

## JCP-SFP-RJ45

**10GBASE-T Copper SFP+ Transceiver**  
**RoHS6 Compliant**



### Features

- ◆ Support 10GBASE-T Operation in Host Systems
- ◆ Support RX\_LOS as Link indication function
- ◆ Hot-Pluggable SFP Footprint
- ◆ Compact RJ-45 Connector Assembly
- ◆ Compliant with SFP MSA
- ◆ Operating Case Temperature:  
Extended: -10°C~70°C

### Applications

- ◆ 10G BASE-T IEEE 802.3an

### Order Information

Part No.	Data Rate	Media type	Distance	Connector	Temperature
JCP-SFP-RJ45* <sup>Note1</sup>	10G	CAT6A/C AT7	30m	RJ45	Extended

Note1: Standard version.

\*The product image only for reference purpose.

**Regulatory Compliance** <sup>\*Note2</sup>

Product Certificate	Certificate Number	Applicable Standard
TUV	R50135086	EN 60950-1:2006+A11+A1+A12+A2
		EN 60825-1:2014
		EN 60825-2:2004+A1+A2
UL	E317337	UL 60950-1
		CSA C22.2 No. 60950-1-07
EMC CE	AE 50285865 0001	EN 55022:2010
		EN 55024:2010
FCC	WTF14F0514417E	47 CFR PART 15 OCT., 2013
FDA	/	CDRH 1040.10
ROHS	/	2011/65/EU

Note2: The above certificate number updated to June 2014, because some certificate will be updated every year, such as FDA and ROHS. For the latest certification information, please check with Data Controls Inc.

**Product Description**

JCP-SFP-RJ45 10G BASE-T Copper Small Form Pluggable (SFP) modules are based on the SFP Multi Source Agreement (MSA). It is compliant with the 10G BASE-T, 1000BASE-T, 100BASE-TX standards as specified in IEEE STD 802.3an, 802.3ab and 802.3au.

**Absolute Maximum Ratings\***

Parameter	Symbol	Min	Typ	Max	Units
Maximum Supply Voltage	V <sub>cc</sub>	-0.5		4.0	V
Storage Temperature	T <sub>s</sub>	-40		85	°C

\*Exceeding any one of these values may destroy the device permanently.

**Normal operating condition**

Parameter	Symbol	Min	Typ	Max	Units
Operating Case Temperature	T <sub>c</sub>	JCP-SFP-RJ45		-10	70 °C
Supply Voltage	V <sub>cc</sub>	3.14	3.3	3.46	V

**Electrical Characteristics**

Parameter	Symbol	Min	Typ	Max	Units	Notes/Conditions
<b>+3.3 Volt Electrical Power Interface</b>						
Supply Current <sup>*Note4</sup>	I <sub>cc</sub>			800	mA	
Input Voltage	V <sub>cc</sub>	3.13	3.3	3.47	V	
<b>Low-Speed Signals, Electronic Characteristics</b>						
SFP Output LOW	V <sub>OL</sub>	0		0.5	V	4.7k to 10k pull-up to host_V <sub>cc</sub> , measured at host side of connector

SFP Output HIGH	V <sub>OH</sub>	host_Vcc – 0.5		host_Vcc + 0.3	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
SFP Input LOW	V <sub>IL</sub>	0		0.8	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector
SFP Input HIGH	V <sub>IH</sub>	2		Vcc + 0.3	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector
<b>High-Speed Electrical Interface, Transmission Line-SFP</b>						
Tx Output impedance	Z <sub>out,TX</sub>		100		Ohm	
Rx Input Impedance	Z <sub>in,RX</sub>		100		Ohm	
<b>High-Speed Electrical Interface, Host-SFP</b>						
Single ended data input swing	V <sub>in</sub>	250		1200	mV	Single ended
Single ended data output swing	V <sub>out</sub>	350		800	mV	Single ended
Rise/Fall Time	T <sub>r</sub> ,T <sub>f</sub>		20		psec	20%-80%
Tx Input Impedance	Z <sub>in</sub>		50		Ohm	Single ended
Rx Output Impedance	Z <sub>out</sub>		50		Ohm	Single ended

## Pin Descriptions

Pin No.	Name	Function	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	
2	TX Fault	Transmitter Fault Indication	3	Not used
3	TX Disable	Transmitter Disable	3	1
4	MOD-DEF2	Module Definition 2	3	2
5	MOD-DEF1	Module Definition 1	3	2
6	MOD-DEF0	Module Definition 0	3	2
7	RS0	No Connection required	3	
8	LOS	Loss of Signal	3	RX_LOSS
9	RS1	No Connection required	1	
10	VeeR	Receiver Ground	1	
11	VeeR	Receiver Ground	1	
12	RD-	Inv. Received Data Out	3	
13	RD+	Received Data Out	3	
14	VeeR	Receiver Ground	1	

15	VccR	Receiver Power	2	
16	VccT	Transmitter Power	2	
17	VeeT	Transmitter Ground	1	
18	TD+	Transmit Data In	3	
19	TD-	Inv. Transmit Data In	3	
20	VeeT	Transmitter Ground	1	

**Notes:**

Note4 The power dissipation of JCP-SFP-RJ45 is higher than normal 10G optical transceiver.


Please Notice:

The number of JCP-SFP-RJ45 needs to be determined according to the power supply capability of equipment.

Make sure the air flow is well for SFP in equipment;

Leave the adjacent port empty if possible;

**The following is the Diagram of host board connector block pin numbers and names**

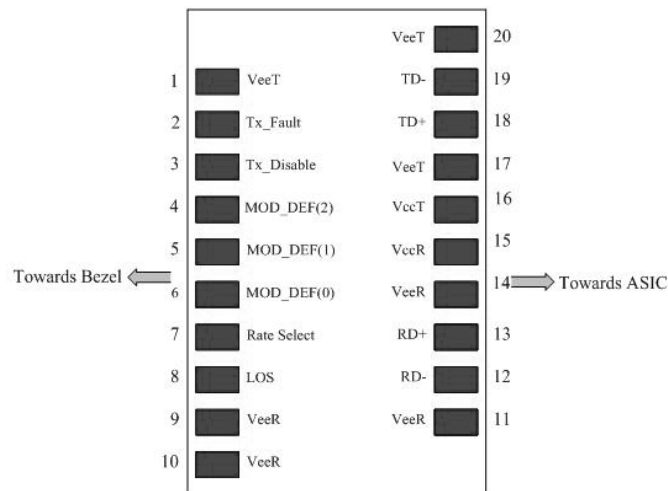

## Serial Communication Protocol

Data Controls Inc. Copper SFPs support the 2-wire serial communication protocol outlined in the SFP MSA, These SFP use a 128 byte EEPROM with an address of A0H.

## EEPROM Serial ID Memory Contents

Accessing Serial ID Memory uses the 2 wire address 1010000X (A0H). Memory Contents of Serial ID are shown in Table 1.

**Table 1 Serial ID Memory Contents**


Addr.	Size (Bytes)	Name of Field	Hex	Description
<b>BASE ID FIELDS</b>				
0	1	Identifier	03	SFP
1	1	Ext. Identifier	04	SFP function is defined by serial ID only
2	1	Connector	07	-LC
3-10	8	Transceiver	10 00 00 00 00 00 00 00	Transmitter Code
11	1	Encoding	06	64B/66B
12	1	BR, Nominal	67	10.3G
13	1	Reserved	00	-
14	1	Length (9µm)km	00	
15	1	Length(9µm)100m	00	
16	1	Length (50µm) 10m	08	80m
17	1	Length(62.5µm)10m	02	20m
18	1	Length (Copper)	00	
19	1	Reserved	1E	300m
20-35	16	Vendor name	XX XX XX XX XX XX XX XX <sup>(Note3)</sup> 20 20 20 20 20 20 20 20	Vendor name (ASCII)
36	1	Reserved	00	-
37-39	3	Vendor OUI	XX XX XX <sup>(Note3)</sup>	-
40-55	16	Vendor PN	XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX <sup>(Note3)</sup>	Transceiver part number
56-59	4	Vendor rev	XX XX XX XX <sup>(Note3)</sup>	-
60-61	2	Wavelength	03 52	-850nm
62	1	Reserved	00	-
63	1	CC_BASE	Check Sum (Variable)	Check code for Base ID Fields
<b>EXTENDED ID FIELDS</b>				
64-65	2	Options	00 1A	TX_DISABLE, TX_FAULT and Loss of Signal implemented.
66	1	BR,max	00	
67	1	BR,min	00	
68-83	16	Vendor SN	XX XX XX XX XX XX XX XX 20 20 20 20 20 20 20 20 <sup>(Note3)</sup>	Serial Number of transceiver (ASCII). For example "B000822".

84-91	8	Date code	XX XX XX XX XX XX XX XX <sup>(Note3)</sup>	Manufactory date code. For example "080405".
92	1	Diagnostic Monitoring Type	XX <sup>(Note3)</sup>	Digital diagnostic monitoring implemented
93	1	Enhanced Options	XX <sup>(Note3)</sup>	Optional flags
94	1	SFF_8472 Compliance	XX <sup>(Note3)</sup>	01 for diagnostics (Rev9.3 SFF-8472).
95	1	CC_EXT	Check Sum (Variable)	Check sum for Extended ID Field.
<b>VENDOR SPECIFIC ID FIELDS</b>				
96-127	32	Vendor Specific	Read only	Depends on customer information
128-255	128	Reserved	Read only	-

Note3: The "XX" byte should be filled in according to practical case. For more information, please refer to the related document of SFP Multi-Source Agreement (MSA).

## Mechanical Specifications

Data Controls Inc.'s Copper SFP transceivers are compliant with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

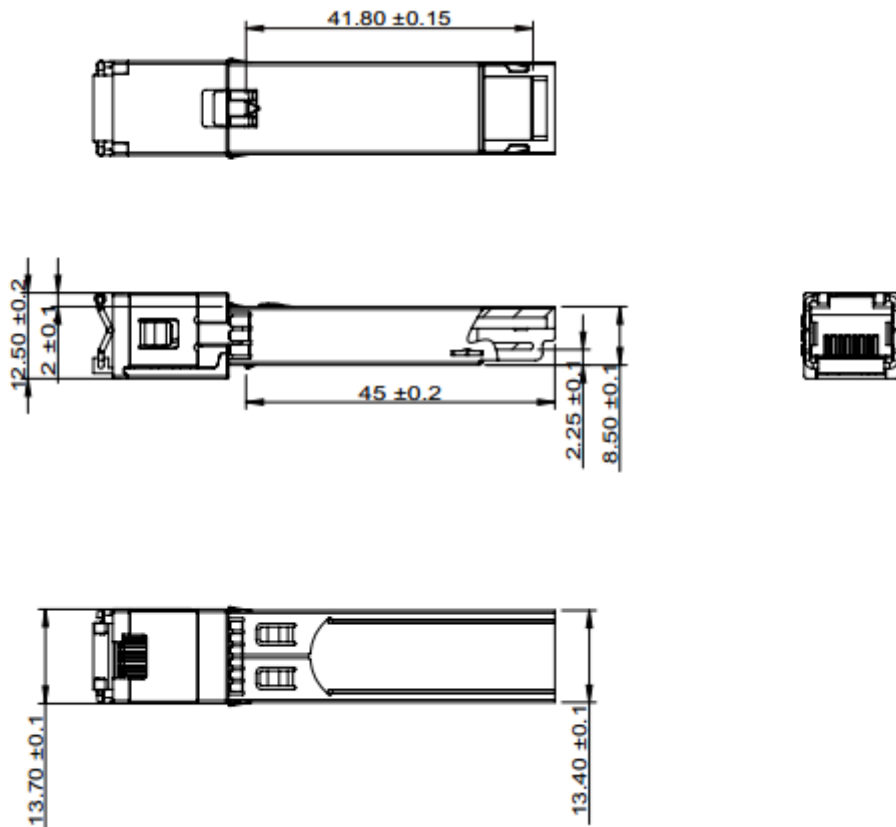

\*This 2D drawing only for reference, please check with Data Controls Inc. before ordering.

## Obtaining Document

You can visit our website:

<http://www.dci.jp>

Or contact Data Controls Inc. Listed at the end of the documentation to get the latest documents.

## Revision History

Revision	Revision History	Release Date
V1.a	Released.	Dec 21, 2016
V1.b	Updated distance, operation temperature ,2D drawing and added the power dissipation note	Mar 3, 2017

## Notice:

Data Controls Inc. reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the optical link products are for illustrative purposes only. Data Controls Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## Contact:

E-mail:sales@dci.jp

<http://www.dci.jp>